

ELECTROWINNING CELLS



DESIGN FEATURES:

(FOR GOLD/SILVER RECOVERY)

- Polypropylene or SS tank construction.
- SS cathode frame with removable SS mesh pads.
- Perforated SS anode plates.
- Hinged lids with built in ventilation hoods.
- Drip-proof design.
- Exterior copper Busbar for ease of electrical connections and corrosion resistance.
- Slopped bottoms toward drain for easier sludge removal.
- Adjustable interior weir plate for tank level control.



SS EW CELL




POLYPRO EW CELL



DENVER
MINERAL ENGINEERS, INC.
10,001 S. Highway 121, RR#9
Littleton, CO 80125

Telephone: (303) 932-6280
Fax: (303) 932-6205
E-Mail: sales@denvermineral.com
Web Page: <http://www.denvermineral.com>

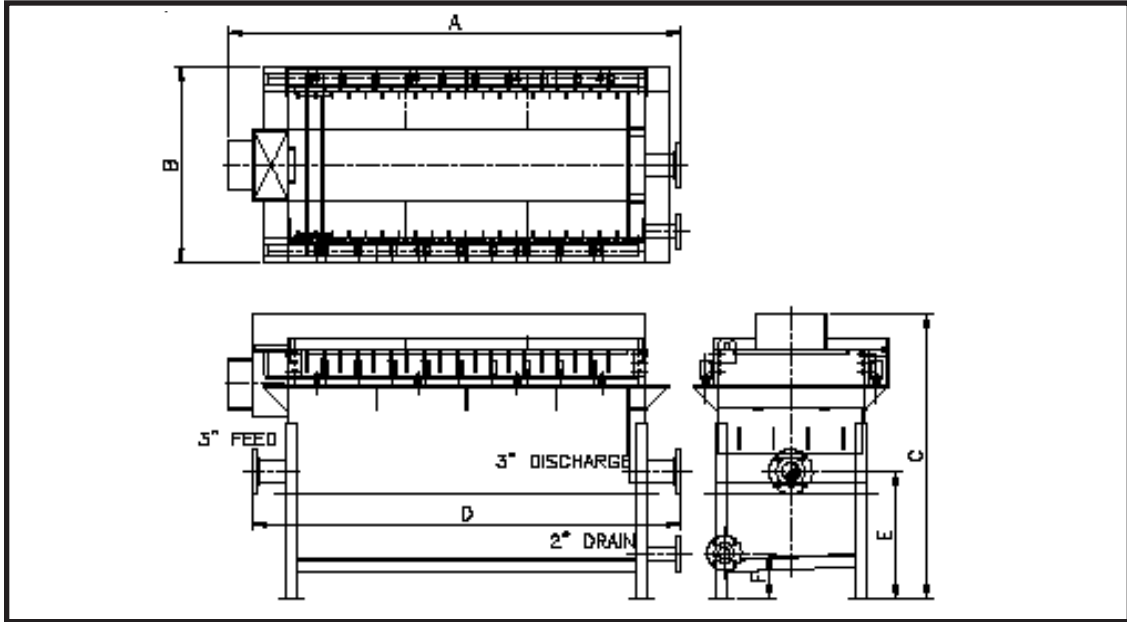

SPECIFICATIONS

Model No.	Capacity (cu. ft.)	Weight (lbs.)	Dimensions					
			A	B	C	D	E	F
EC-229 ss	28	980	6-5 1/2"	2-9 3/8"	4-0 13/16"	6-1 1/2"	1'-9 3/4"	7 13/16"
EC-229 pp	27	950	6-5 1/2"	2-9 3/8"	4-0 13/16"	6-1 1/2"	1'-9 3/4"	7 13/16"
EC-2218 ss	52	2115	10-9 1/4"	2-9 3/8"	4-0 13/16"	10-5 1/4"	1'-9 3/4"	7 13/16"
EC-2218 pp	50	2100	10-9 1/4"	2-9 3/8"	4-0 13/16"	10-5 1/4"	1'-9 3/4"	7 13/16"
EC-239 ss	38	1500	6-5 1/2"	2-9 3/8"	5-0 13/16"	6-1 1/2"	2-3 3/4"	8"
EC-239 pp	37	1400	6-5 1/2"	2-9 3/8"	5-0 13/16"	6-1 1/2"	2-3 3/4"	8"
EC-2318 ss	69	2315	10-9 1/4"	2-9 3/8"	5-0 13/16"	10-5 1/4"	2-3 3/4"	8"
EC-2318 pp	69	2315	10-9 1/4"	2-9 3/8"	5-0 13/16"	10-5 1/4"	2-3 3/4"	8"
EC-339 ss	57	1470	6-5 1/2"	3-9 3/8"	5-0 13/16"	6-1 1/2"	2-3 3/4"	8"
EC-339 pp	56	1450	6-5 1/2"	3-9 3/8"	5-0 13/16"	6-1 1/2"	2-3 3/4"	8"
EC-3318 ss	106	2940	10-9 1/4"	3'-11 3/8"	5-0 13/16"	10-5 1/4"	2-3 3/4"	8"
EC-3318 pp	101	2880	10-9 1/4"	3'-11 3/8"	5-0 13/16"	10-5 1/4"	2-3 3/4"	8"

ss: stainless steel
 pp: polypro